


## Updating the Data Communicator

An update is available for the Data Communicator. First update the configuration wizard (section 1). You can then install the update for the Data Communicator (section 2).


- ⚠ Connect the laptop to the power supply to ensure that the process runs smoothly.
- ⚠ The Data Communicator update must be carried out in direct proximity to the coffee machine (max. 0.5 m away).



### 1 Updating the configuration wizard

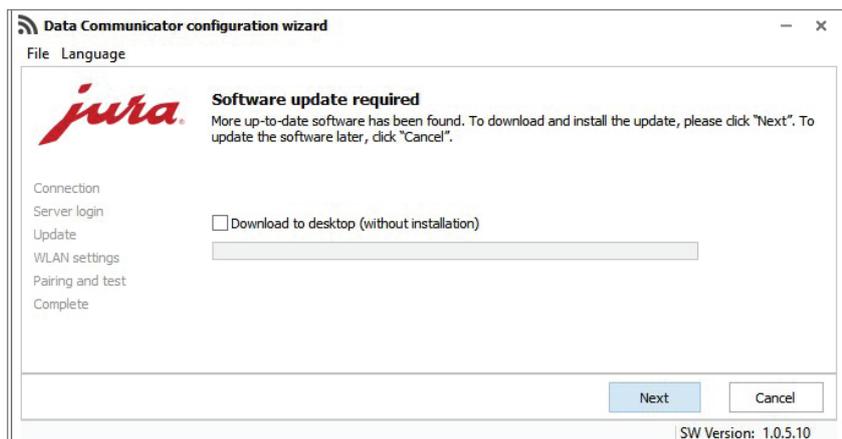


- Open the configuration wizard installed on your Windows laptop. The program will notify you that an update is available.
- ⚠ If the configuration wizard is no longer installed, you can download it here: [www.datacommunicator.jura.com/configurator/Configurator\\_Setup.exe](http://www.datacommunicator.jura.com/configurator/Configurator_Setup.exe)
- Click on "Next" **without** selecting the checkbox.

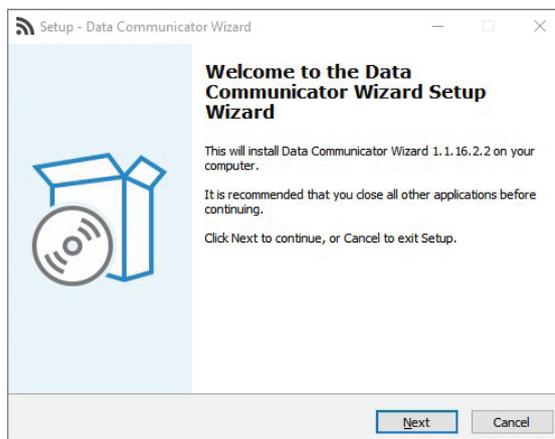


The setup wizard is launched (version 1.1.16.2.2).

- Click on "Next" and follow the installation instructions.


### 2 Updating the Data Communicator

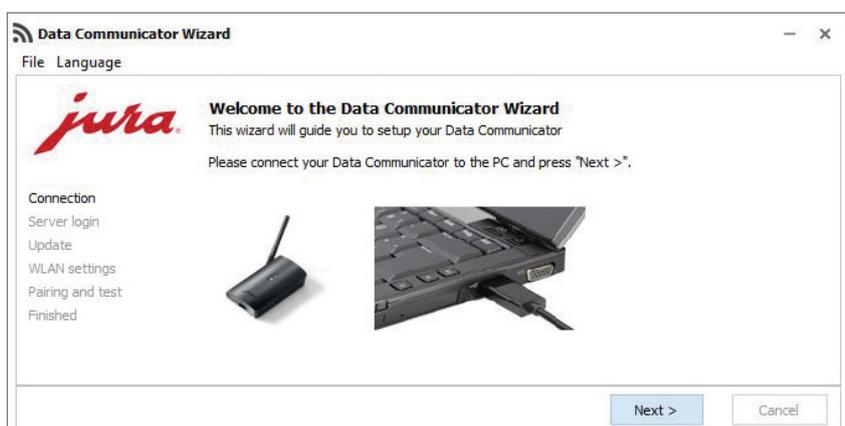


- Open the configuration wizard that you have just installed and connect the Data Communicator to the Windows laptop using the USB cable.
- Click on "Next".

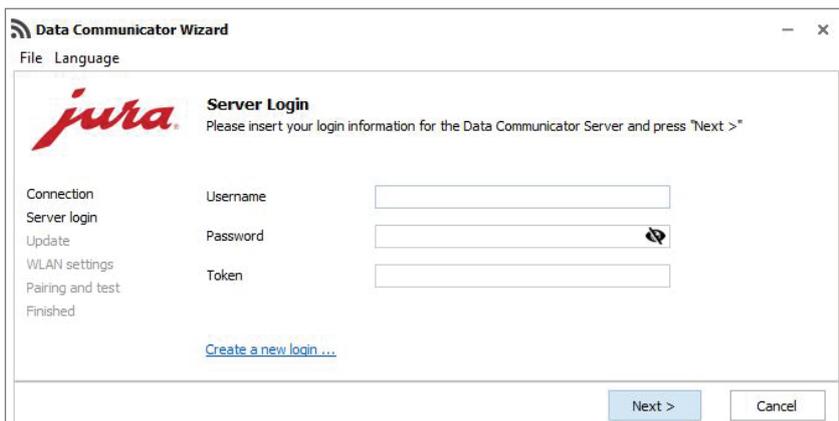

- Log in with your user details.
- Click on "Next".

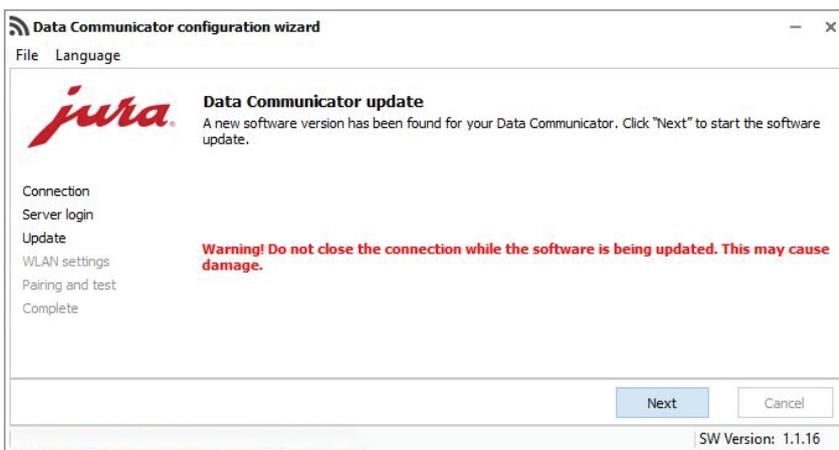


- Click on "Next" to start the update.

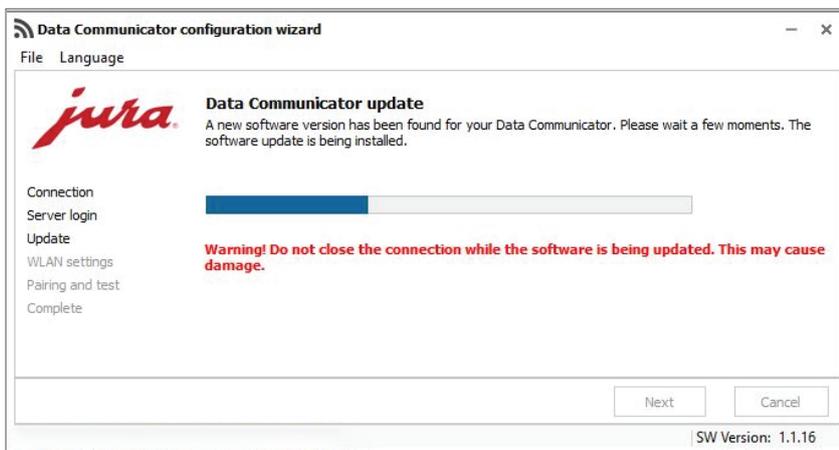


The update starts.


While the software is downloading, the LEDs on the Data Communicator (blue and white) flash very quickly.

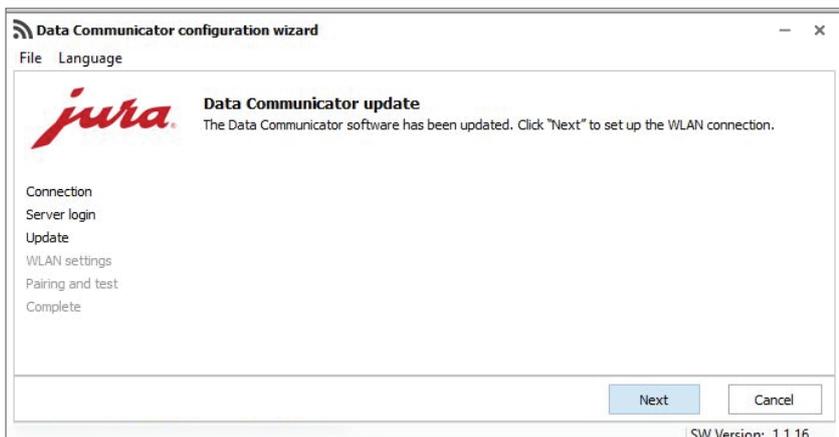

- Once the update is complete: Click on "Next".

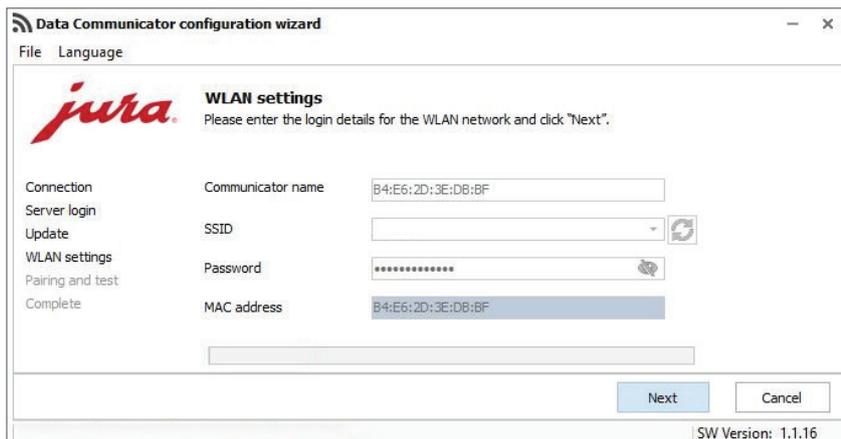


- Confirm the WLAN settings by clicking on "Next".

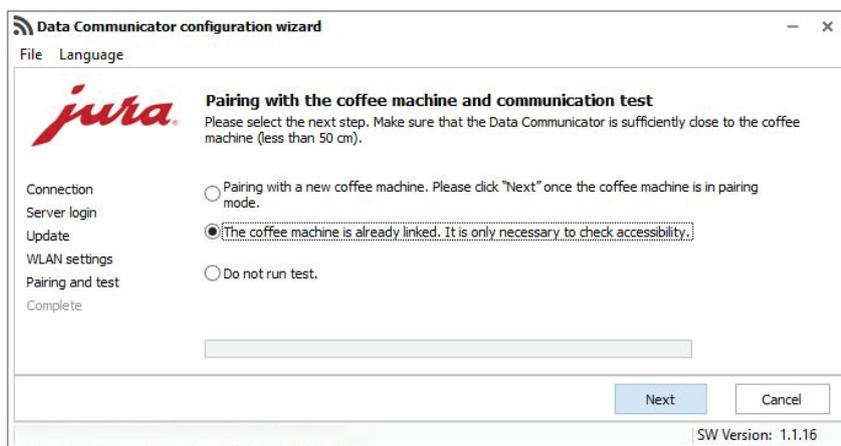


- Perform a **communication test** with a coffee machine that is already connected. To do this, click on "Next". You can also choose to **pair** the Data Communicator with a new coffee machine.


⚠ To do this, the Smart Connect fitted in the coffee machine must be in pairing mode. To set the machine to pairing mode, press the reset button on the Smart Connect or press/touch "Connect" in the machine's programming mode. When the LED on the Smart Connect flashes, click on "Next". Distance between coffee machine and Data Communicator during pairing: **max. 0.5 m**.

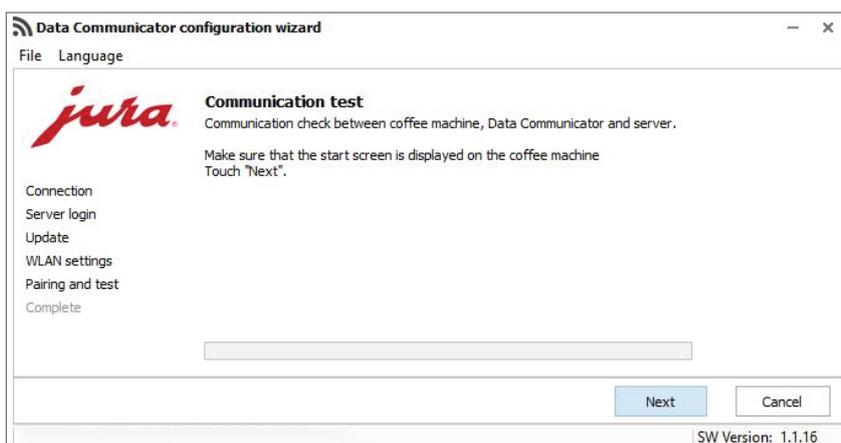

- ⚠ For the communication test the coffee machine's start screen must be displayed.
- Click on "Next" to start the communication test.

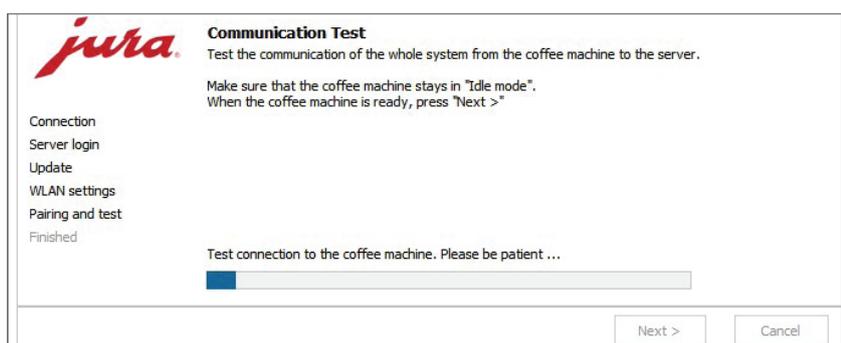

The communication test runs.

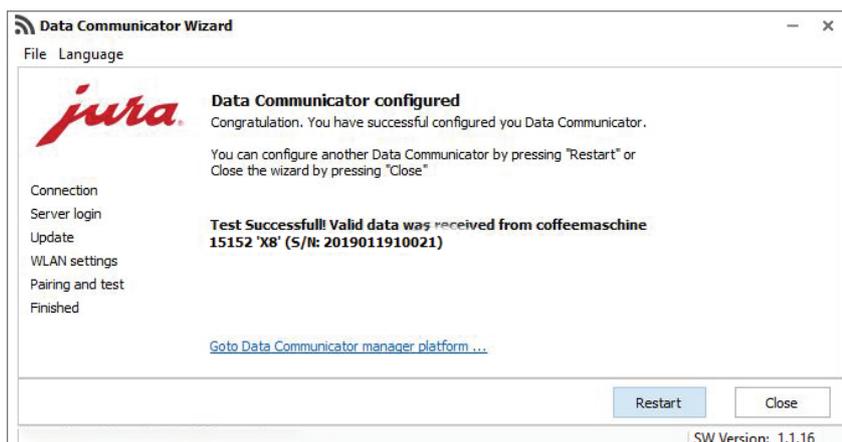

The communication test was successful.

- Click on "Restart" if you want to update another Data Communicator or
- Click on "Close" if you want to exit the configuration wizard.

## Tips / Troubleshooting

---

- If problems occur during the update: Unplug the USB cable and disconnect the Data Communicator from the power supply for 5 seconds. Then start the update process again.